

Nail Plug-NP




Features

For quick fastening of frames, wooden strips, profiles, etc. The nail fits exactly in the plug and this brings the best splitting effect and higher pull out strength.

For use in

Concrete Curb, Brick, Sand-lime Brick, Concrete Block, Natural Stone, Air-Brick

Installation Steps

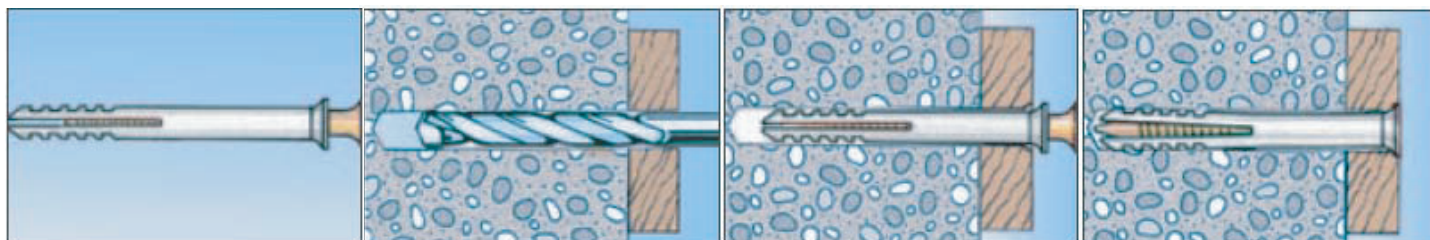

Select a right size of the plug and the drill bit according to the table below.

Please drill a hole deep enough as in the table below.

Insert the nail plug through the fixture into the hole and hit it with a hammer.

Nail part can be pulled out by unscrewing.

Size

| Art-No. | Size | Diameter | Drill depth | Anchorage Depth | Parts thickness |
|---------|-------|----------|-------------|-----------------|-----------------|
| NP6-40 | 6X40 | 6mm | 40mm | 30mm | 10mm |
| NP6-60 | 6X60 | 6mm | 40mm | 30mm | 30mm |
| NP6-80 | 6X80 | 6mm | 40mm | 30mm | 50mm |
| NP8-60 | 8X60 | 8mm | 50mm | 40mm | 20mm |
| NP8-80 | 8X80 | 8mm | 50mm | 40mm | 40mm |
| NP8-100 | 8X100 | 8mm | 50mm | 40mm | 60mm |
| NP8-120 | 8X120 | 8mm | 50mm | 40mm | 80mm |
| NP8-135 | 8X135 | 8mm | 50mm | 40mm | 95mm |